

LumiLine SYSTEM



PRODUCT INFORMATION

Contents

LumiLine 1200	2
LumiLine 600	3
Connecting Corners	4
Mounting Hardware	5
Gallery	6



Contact us

EMAIL

info@ledsnaps.com

PHONE

+44 (0) 1233 423 360

WEBSITE

www.ledsnaps.com

HEADQUARTERS

Units 21-24
Creative Enterprise Quarter
Javelin Way / Ashford / Kent
TN24 8FN

PRODUCT DATA SHEET



LumiLine System - 1200



PRODUCT DESCRIPTION

Modular design for ease of install.

Multiple installation options:
Suspended/Surface mounted/Linkable.

The typical life of the product is 50,000 hours.

Clear polycarbonate cover + PMMA prismatic plate + frosted film.

Interchangeable CCT
3000K/4000K/5000K with switch.


Flicker free and high efficiency LED driver.

High lumen efficiency, 100LM/W.

Non dim (on/off) / 0-10V or DALI (available upon request)

SPECIFICATION DATA

Light Source	2835 SMD
Typical source life	50,000 hrs
Power requirement	220-240 VAC
Power consumption	36W
Colour temperature	3000K/4000K/5000K
Beam angle	80°
Housing	Aluminium
Cover	PC
IP rating	IP20
Operating temperature	-20°C - +45°C
Storage temperature	-20°C - +65°C
Dimensions	1200mm x 80mm x 58mm
Weight	1.9kg

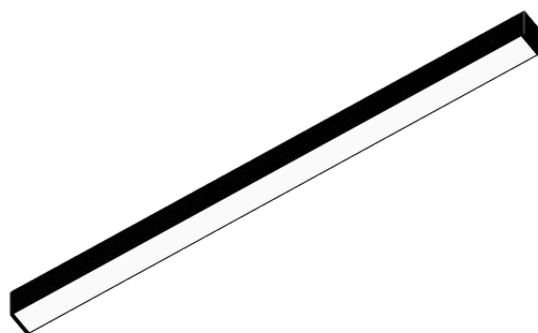

PRODUCT DATA SHEET



LumiLine System - 600



PRODUCT DESCRIPTION

Modular design for ease of install.

Multiple installation options:
Suspended/Surface mounted/Linkable.

The typical life of the product is 50,000 hours.

Clear polycarbonate cover + PMMA prismatic plate + frosted film.

Interchangeable CCT
3000K/4000K/5000K with switch.


Flicker free and high efficiency LED driver.

High lumen efficiency, 100LM/W.

Non dim (on/off) / 0-10V or DALI (available upon request)

SPECIFICATION DATA

Light Source	2835 SMD
Typical source life	50,000 hrs
Power requirement	220-240 VAC
Power consumption	18W
Colour temperature	3000K/4000K/5000K
Beam angle	80°
Housing	Aluminium
Cover	PC
IP rating	IP20
Operating temperature	-20°C - +45°C
Storage temperature	-20°C - +65°C
Dimensions	600mm x 80mm x 58mm
Weight	1kg

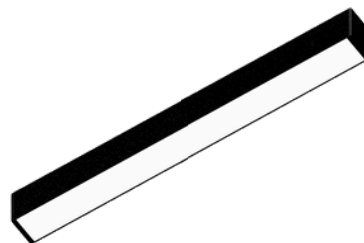

PRODUCT DATA SHEET



LumiLine System - Connecting corners



PRODUCT DESCRIPTION

Modular design for ease of install.

Multiple installation options:
Suspended/Surface mounted/Linkable.

The typical life of the product is 50,000 hours.

Clear polycarbonate cover + PMMA prismatic plate + frosted film.

Interchangeable CCT
3000K/4000K/5000K with switch.


Flicker free and high efficiency LED driver.

High lumen efficiency, 100LM/W.

Non dim (on/off) / 0-10V or DALI (available upon request)

SPECIFICATION DATA

Light Source	2835 SMD
Typical source life	50,000 hrs
Power requirement	220-240 VAC
Power consumption	19W 15W 11W
Colour temperature	3000K/4000K/5000K
Beam angle	80°
Housing	Aluminium
Cover	PC
IP rating	IP20
Operating temperature	-20°C - +45°C
Storage temperature	-20°C - +65°C
Dimensions	142mm (arm length) x 80mm x 58mm
Weight	1.25kg 1kg 0.7kg

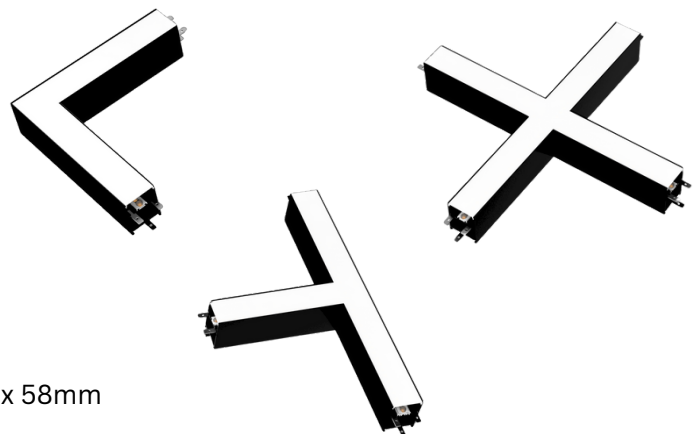

PRODUCT DATA SHEET




LumiLine System - Mounting hardware

DESCRIPTION

LumiLine system can be fitted as suspended lighting fixtures using a drop wire.

Alternatively the lighting fixtures can be surface mounted onto a flat surface.

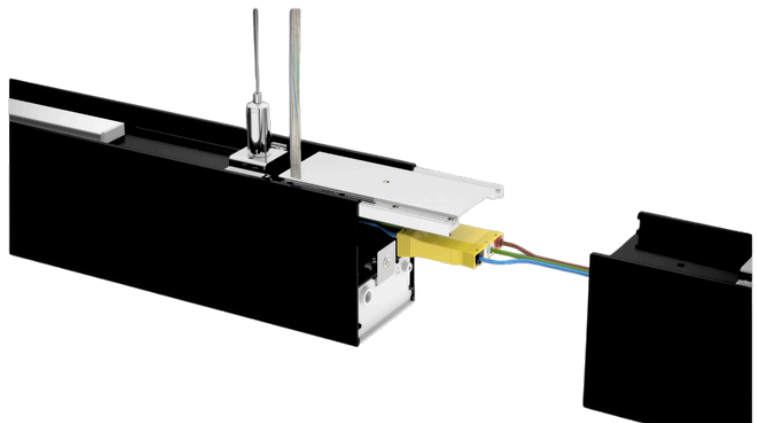

LumiLine System

Gallery

